


Flexible shaft

ROTOmax 2.0



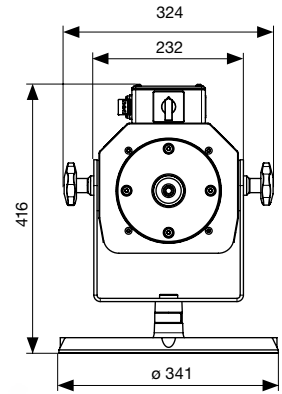


Applications

Grinding, cutting, roughing, descaling, polishing, brushing, etc. For heavy duty work in foundries, in boilermaking and steel fabrication, in mechanical workshops, in stainless steel processing companies.




















- Stable high-power motor and robust metal housing
- Can be controlled from hand-held unit through optional manual shut-off
- With soft start and brake
- Choice of 3 models:
F: with base plate
HM: with hanging attachment
STM: trolley mounted



Technical data

	Type	Connection	Order No.	Voltage	Idling speed min ⁻¹	Power Input kW	Weight kg
	F	DIN 10	110 252	230/240V, 50/60Hz	500 – 13 000	2,0	27,000
	STM	DIN 10	110 254	230/240V, 50/60Hz	500 – 13 000	2,0	50,000
	HM	DIN 10	110 256	230/240V, 50/60Hz	500 – 13 000	2,0	27,000
1-phase AC motor		Overload protection			Protection		
					⊕, IP 45		

Possible combinations

Type	Order No.	Type	Order No.	Page	Type	Order No.	Page	
 <p>ROTOmax 2.0 2,00 kW</p>		 <p>NA 7 × 1500 DIN 10/G 22</p>	030 007 02	265	G 22	 <p>FH 7 INOX (6mm)</p>	110 235 01 250	
		 <p>WI 7 (6mm)</p>	057 645 01	252	 <p>WI 7-45° (6mm)</p>	057 662 01	252	
		 <p>WB 7</p>	110 221 01	263	 <p>FH 10 INOX (6mm)</p>	110 232 01	250	
		 <p>NA 10 × 2000 DIN 10/G 28</p>	030 026 03	265	G 28	 <p>WI 10 (6mm)</p>	057 645 03	252
		 <p>WI 10-45° (6mm)</p>	057 662 03	252	 <p>WB 10</p>	110 222 01	263	
		 <p>FH 12 INOX (12mm)</p>	110 233 01	250	 <p>SWH</p>	110 237 01	256	
 <p>Foot switch with protective cover/ 300 012 88</p>		 <p>NA 12 × 2000 DIN 10/G 28</p>	030 029 02	265	G 28	 <p>BSG 10/50</p>	052 630 01	260
		 <p>FSM 1:1</p>	057 891 01	258	 <p>FTM</p>	110 223 01	259	

Rotomax 4.0

- 4000W 415V 3 Ph
- 500 to 10,000 Rpm
- For 12, 15mm Shafts
- Massive Power & Durability



Rotoset

- 1050W
- 11,000-25,000 Rpm
- For 7mm Shafts



Minifix

- 500W
- 11,000-25,000 Rpm
- For 4mm Shafts

